

FIG. 3A

FIG. 3B

FIG. 3C

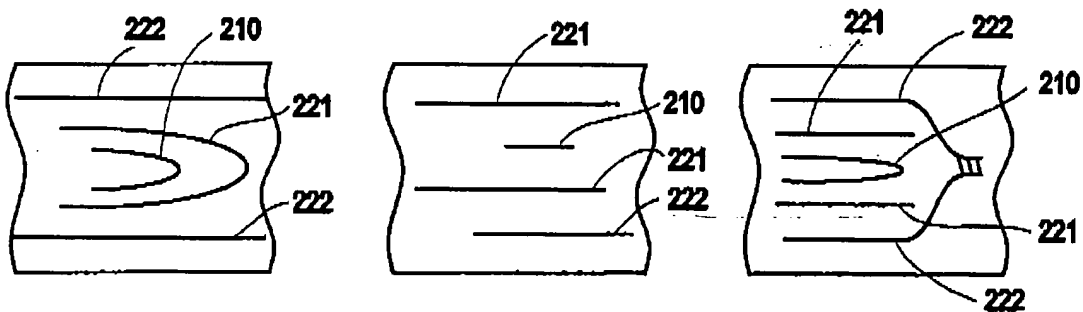


FIG. 3D

FIG. 3E

FIG. 3F

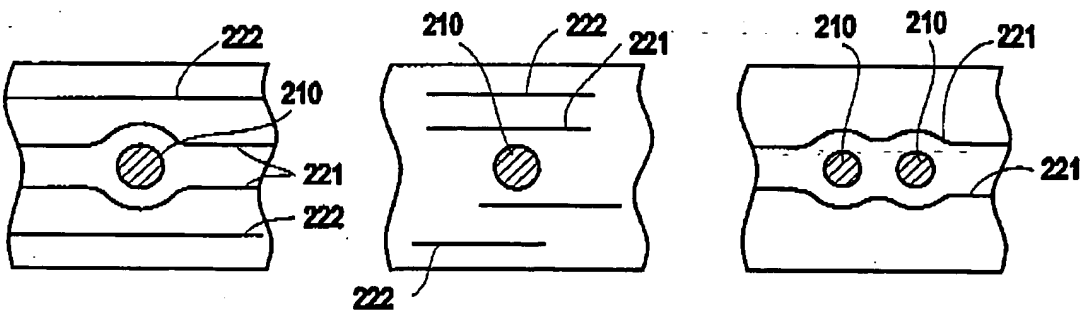


FIG. 3G

FIG. 3H

FIG. 3I




FIG. 3J




FIG. 3K




FIG. 3L

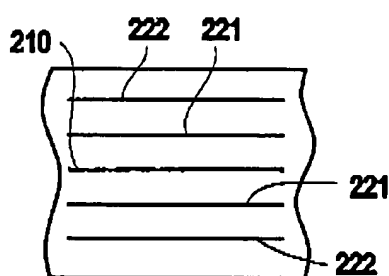


FIG. 3M




FIG. 3N




FIG. 3O




FIG. 3P




FIG. 3Q




FIG. 3R

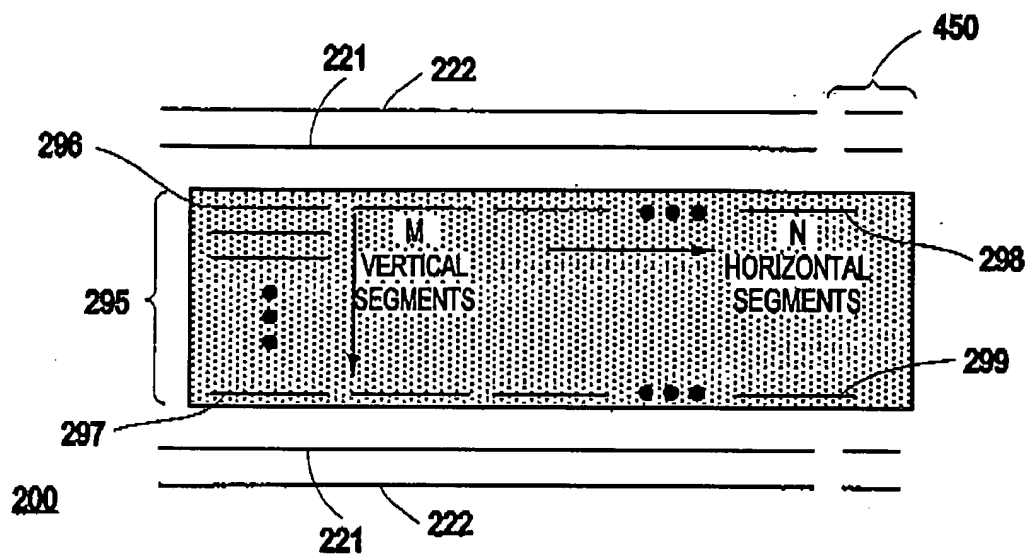


FIG. 4A

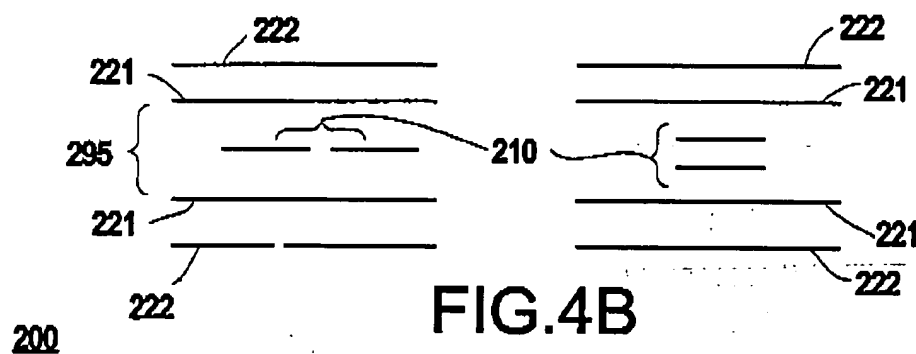


FIG. 4B

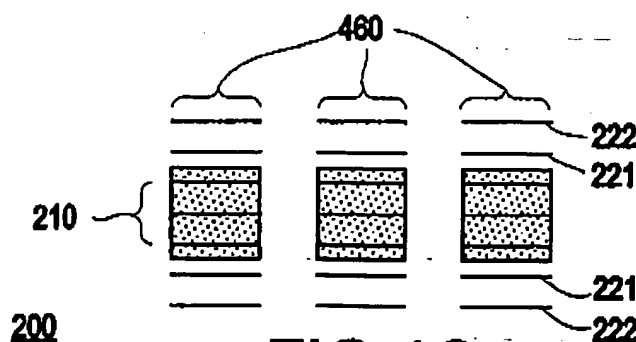


FIG. 4C

Annotated Sheet

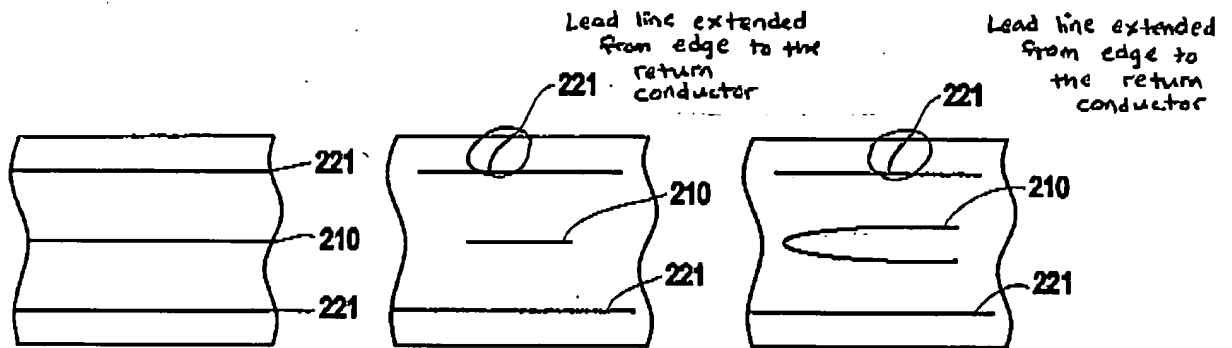


FIG. 3A

FIG. 3B

FIG. 3C

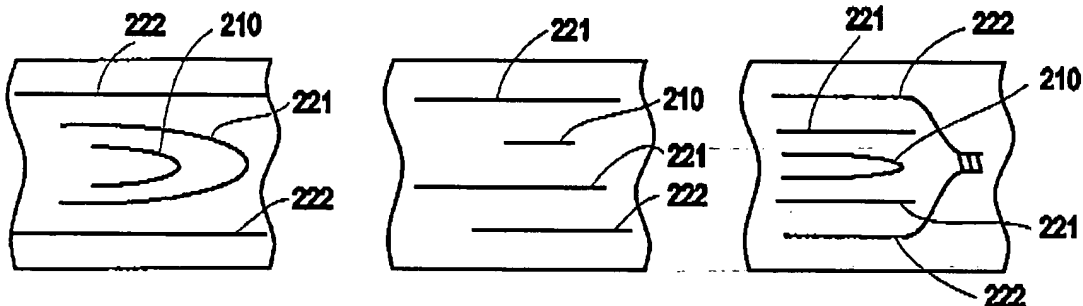


FIG. 3D

FIG. 3E

FIG. 3F

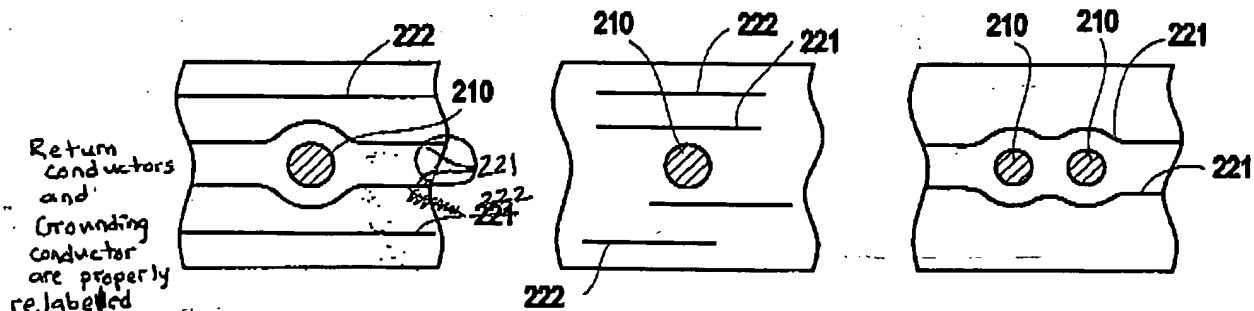


FIG. 3G

FIG. 3H

FIG. 3I

Annotated Sheet




FIG. 3J




FIG. 3K




FIG. 3L

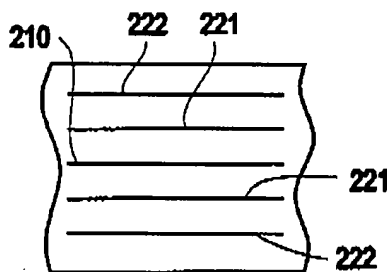


FIG. 3M




FIG. 3N




FIG. 3O

Electrifiable conductor and
Return conductor are properly relabeled




FIG. 3P




FIG. 3Q




FIG. 3R

Annotated Sheet

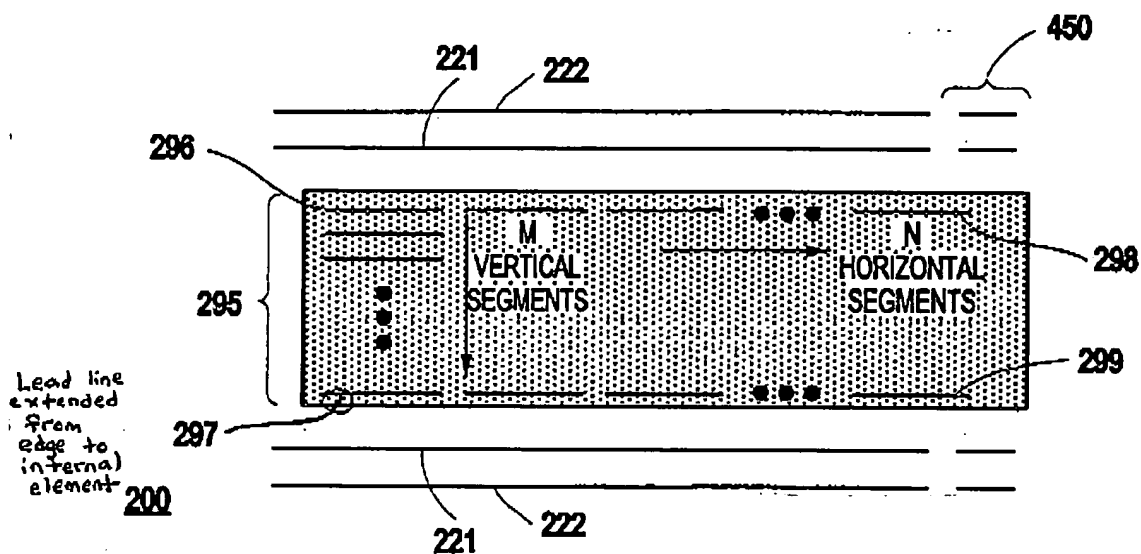


FIG. 4A

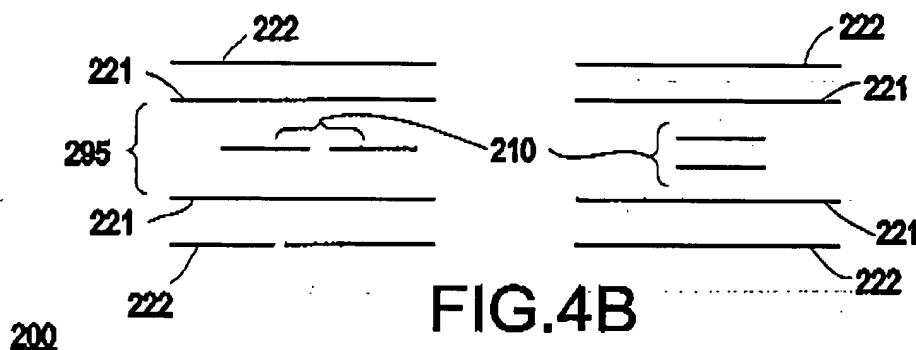


FIG. 4B

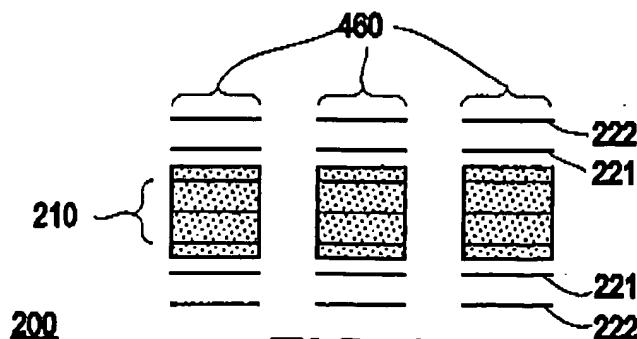


FIG. 4C